

Control your flow

Alfa Laval Unique RV-ST Regulating Valve

2.7

Concept

Unique RV-ST is the third generation of Alfa Laval single seat regulating valves designed to meet the highest process demands of hygiene and safety. Built on a well-proven, platform from an installed base of more than one million valves, it is ideal for high volume, hygienic liquid processing applications where precision control of flow rate or pressure is required.

Working principle

The valve is remote-controlled by a digital electro-pneumatic process controller. It has few and simple moveable parts which results in a very reliable valve.



TECHNICAL DATA

Max. product pressure: 10 bar (1000 kPa).
Min. product pressure: Full vacuum.
Temperature range: 10°C to +140°C (EPDM).
Air pressure: 5 - 7 bar (500 to 700 kPa).

Positioner data

Material: PPS, stainless steel
Cover: PC
Seals: EPDM
Supply voltage: 24 VDC +/- 10%
Working temperature: 0 to 55 °C
Push-in fittings: \emptyset 6mm or 1/4"
Protection class: IP65 and IP67
Position detection module: . . . Contact-free, wear-free
Communication: Analog


8692 Positioner – Top control with display

Setpoint setting: 0/4 to 20mA and 0 to 5 5/10V
Output resistance: 0/4 to 20 mA: 180 Ω
0 to 5/10V: 19 Ω
Power consumption: < 5W
Cable gland: 2xM16x1,5 (cable- \emptyset 10mm)
Max. wire diameter 1.5 mm²

PHYSICAL DATA

Product wetted steel parts: . . . 1.4404 (316L)
External finish Semi-bright (blasted)
Internal finish Bright (polished), internal Ra < 0.8 μ m
Other steel parts: 1.4301 (304)
Plug seal: EPDM
Other product wetted seals: . . EPDM (standard)
Other seals: NBR

Valve Body Combinations



8694 Positioner – Basic control without display

Setpoint setting: 0/4 to 20mA
Output resistance: 180 Ω
Power consumption: < 3,5W
Cable gland: 2xM16x1,5 (cable- \emptyset 10mm)
Max. wire diameter 1.5 mm²

 Authorized to carry
the 3A symbol

Standard design

Designed to deliver years of reliable performance, it features a broad selection of stainless steel, tapered valve stems along with the Unique actuator to ensure an outstanding degree of precise product control. Rugged and long-lasting plastic stem bushings eliminate metal-to-metal galling. The stems are threaded to the actuator shaft, eliminating the coupling between the stem and the actuator, thereby ensuring proper alignment. The plug seal is a standard seal used for the entire Unique Series. Bushings at the end of the actuator cylinder support the stem and ensure perfect alignment.

Other valves in the same basic design

- Unique Single Seat
- Standard valve
- Reverse acting valve
- Long stroke valve
- Manually operated valve
- Aseptic valve

Options






- a. Male parts or clamp liners in accordance with required standard
- b. Product wetted seals in HNBR or FPM
- c. Maintainable actuator
- d. External surface finish blasted
- e. Optional plug seal: HNBR or FPM

Notel

For further details, see instruction ESE02127

Pressure drop/capacity diagrams

For $\Delta P = 100 \text{ kPa (1bar)}$.

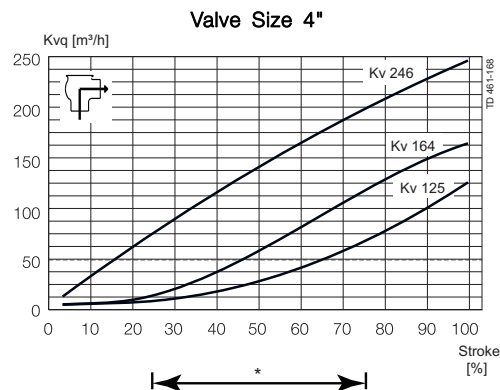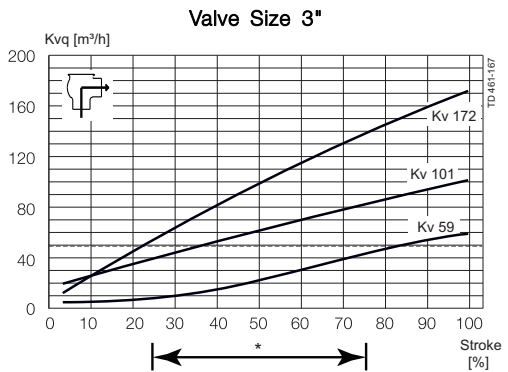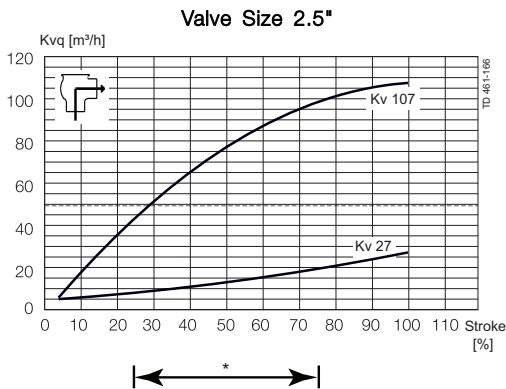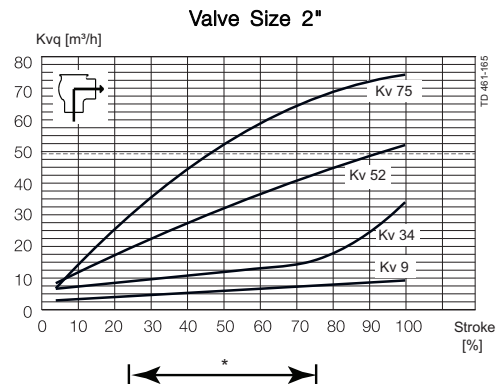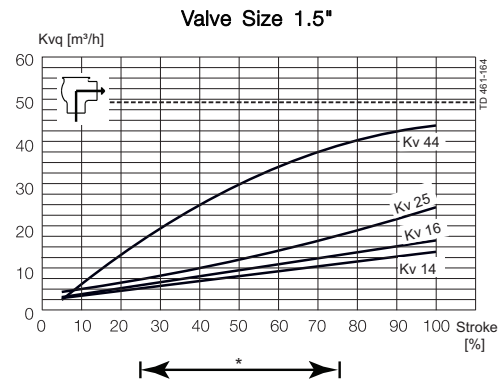

* Recommended working area

Notel

For the diagrams the following applies
Medium: Water (20° C)



Measurement: In accordance with VDI 2173:
----- (dotted line) = Kv 49

Alfa Laval recommend max. flow velocity in tubing and valves to be 5 m/sec.

Pressure data

Table 1 - Shut-off valves

Max. pressure in bar without leakage at the valve seat

Actuator / Valve body combination and direction of pressure	Air pressure [bar]	Plug position	Valve size [mm]				
			DN40/38	DN50/51	DN65/63.5	DN80/76.1	DN100/101.6
	6	NO	7.60	9.60	5.60	7.20	4.80
		NC	6.29	7.20	4.20	6.40	4.20

- A = Air
- P = Product pressure
- AC = Air closes
- SC = Spring closes

Valve Sizing

Flow Coefficients (Kv)

The following formula and flow coefficient values enable you to select the correct regulating valve for your application.

Formula for water and other products with a specific gravity equal to 1.0:

$$Kv = \frac{Q}{\sqrt{\Delta P}}$$

Formula for products with a specific gravity other than to 1.0:

$$Kv = \frac{Q}{\sqrt{\Delta P / SG}}$$

Where:

- Q = Product flow rate in m³ per hour
- SG = Specific gravity of product
- Δ P = Pressure drop across valve in bar (inlet pressure minus outlet pressure)

Example of Kv Calculation:


Determine the proper size valve for 60 m³ per hour of water.

- Inlet pressure of 3 bar
- Outlet pressure of 1,5 bar

Solution: Inlet pressure (A) minus outlet pressure (B):

$$\Delta P = 3 \text{ bar} - 1,5 \text{ bar} = 1,5 \text{ bar}$$


$$Kv = \frac{60}{\sqrt{1,5}} = 49$$

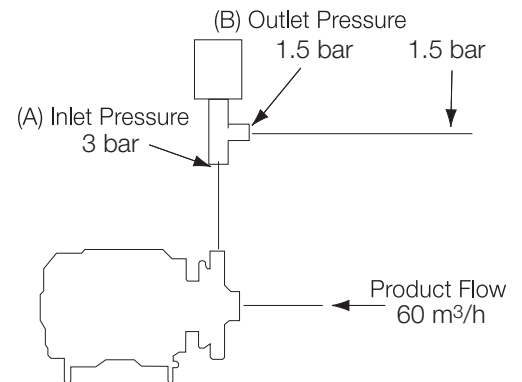

How to Use Data to Select Valve Size

After the Kv factor for a specific application has been calculated, locate the factor on the following page. Choose the curve closest to the 50% stroke.

Using the above example, refer to the chart on the previous page you will find that the Kv factor (49) is marked on the chart. You will find that a 2" valve crosses 1 Kv curve, 2½" 1 curve, 3" 3 curves and 4" 3 curves. The correct valve size to use is 2" because Kv 49 crosses the curve closest to the optimum operating point 50%. Alternatively the 4" valve is also close to the 50%.

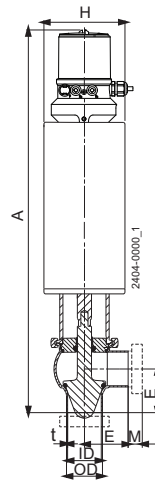

Dimensions (mm)

Size	38	51	63.5	76.1	101.6	DN 40	DN 50	DN 65	DN 80	DN 100
A (with positioner 8694)	450	499	525	558	603	451	500	525	562	606
A (with positioner 8692)	487	536	562	595	640	488	537	562	599	643
OD	38	51	63.5	76.1	101.6	41	53	70	85	104
ID	34.8	47.8	60.3	72.9	97.6	38	50	66	81	100
t	1.6	1.6	1.6	1.6	2	1.5	1.5	2	2	2
E	49.5	61	81	86	119	49,5	61	78	86	120
H	85	115	115	157.5	157.5	85	115	115	157.5	157.5
M/ISO clamp	21	21	21	21	21					
M/DIN clamp						21	21	28	28	28
M/DIN male						22	23	25	25	30
M/SMS male	20	20	24	24	35					
Weight (kg)	7.3	9.5	10.5	16.4	18.6	7.3	9.5	10.5	16.4	18.6

Air Connections Compressed air:


R 1/8" (BSP) internal thread for actuator.

Electrical connections

2.7

Positioner 8694
with display


Terminal strip

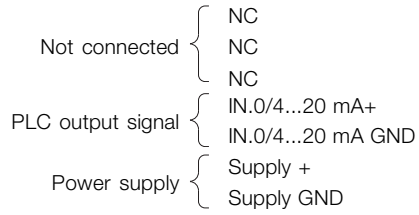


1
2
3
4
5
6
7

Positioner 8692
with display

Terminal strip

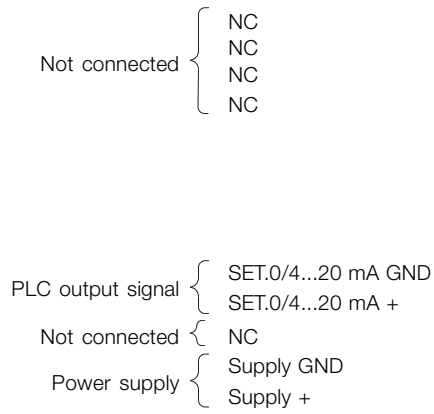

1
2
3
4
5
6
7
8
9
10
11
12
13
14



Product code:: 5913

Material: 1.4404 (316L)
 Connection: ISO Welding ends
 Seals: EPDM
 Inside surface finish: Ra 0.8 µm
 Outside surface finish: Blasted
 Actuator: Pneumatic NC

2.7

Item No.	PPL EUR	Kv value		Size		
		m³/h	Gallon/hour	mm	in	
Valve complete with positioner 8694 without display						
	3809	14	3698	38	1.5	
	3809	16	4227	38	1.5	
	3809	25	6604	38	1.5	
	3809	44	11624	38	1.5	
	3922	9	2378	51	2	
	3922	30	7925	51	2	
	3922	51	13473	51	2	
	3922	75	19813	51	2	
	4378	26	6868	63.5	2.5	
	4378	107	28266	63.5	2.5	
	4946	59	15586	76.1	3	
	4946	101	26681	76.1	3	
	4946	172	45438	76.1	3	
	6195	125	33022	101.6	4	
	6195	164	43324	101.6	4	
	6195	250	66043	101.6	4	
Valve complete with positioner 8692 with display						
	5002	14	3698	38	1.5	
	5002	16	4227	38	1.5	
	5002	25	6604	38	1.5	
	5002	44	11624	38	1.5	
	5116	9	2378	51	2	
	5116	30	7925	51	2	
	5116	51	13473	51	2	
	5116	75	19813	51	2	
	5571	26	6868	63.5	2.5	
	5571	107	28266	63.5	2.5	
	6140	59	15586	76.1	3	
	6140	101	26681	76.1	3	
	6140	172	45438	76.1	3	
	7390	125	33022	101.6	4	
	7390	164	43324	101.6	4	
	7390	250	66043	101.6	4	

Item numbers to be found in Anytime configurator.